

SSB SBL 100-12HR (12V 2527W)

Specification

Nominal Voltage	12V	
Nominal Power (Watt / 20°C / 10.0 V/Battery)	5 min	3169,8 W / 12V-Battery
	10 min	2527,2 W / 12V-Battery
	15 min	2040 W / 12V-Battery
Nominal Power (Watt / 20°C / 1.67 V/C)	5 min	528,3 W / 1.67 V/C
	10 min	421,2 W / 1.67 V/C
	15 min	340 W / 1.67 V/C
Nominal Capacity (10hr / 20°C / 10.0 V/Battery)	84,8 Ah	
Internal Resistance	Fully Charged battery 68°F(20°C)	≤5.0 mOhms
Self-Discharge	3% of capacity declined per month at 20°C (average)	
	SSB series batteries may be stored for up to 6 months at 68°F(20°C) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	
Dimension	Length (mm / inch)	306 / 12.1
	Width (mm / inch)	168 / 6.63
	Height (mm / inch)	210 / 8.27
	Total Height (mm / inch)	215 / 8.46
Approx. Weight (Kg / lbs)	29.0 / 63.9	
Operating Temperature Range (temporarily – see our manual)	Discharge	-20~60°C
	Charge	-0~50°C
	Storage	-20~60°C
Max. Discharge Current 68°F(20°C)	900A(5s)	
Short Circuit Current	2100A	
Charge Methods: Constant Voltage Charge 68°F(20°C)	Cycle use	2.30-2.35VPC
	Maximum charging current	27 A
	Temperature compensation	-3mV/°C
	Standby use	2.23-2.275VPC
Life expectancy	Temperature compensation	-4mV/°C
	10~12 years at 20°C with charge voltage 2.25V/cell	

*All specifications are approximate values



Applications

- ◆ Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- ◆ Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- ◆ UL-recognized component.
- ◆ Can be mounted in any orientation.
- ◆ Computer designed lead, calcium tin alloy grid for high power density.
- ◆ Long service life, float or cyclic applications.
- ◆ Maintenance-free operation.
- ◆ Low self discharge.
- ◆ Case and cover available in both standard and flame retardant ABS.



Conform to:
IEC60896-21&22 and/or IEC61427





Discharge Constant Current (Amperes at 68°F20°C)

F.V/Time	5min	8min	10min	15min	20min	30min	60min	90min	2h	3h	4h	5h	8h	10h	20h
9.60V	317,10	271,50	244,20	194,00	155,80	114,20	65,70	48,60	29,933	21,980	17,853	15,071	10,070	8,564	4,392
10.0V	293,40	254,70	229,10	183,90	145,40	108,90	62,60	46,30	29,495	21,688	17,631	14,897	9,969	8,483	4,357
10.2V	281,20	245,70	220,90	178,20	139,80	105,80	60,80	44,90	28,913	21,299	17,336	14,665	9,833	8,374	4,310
10.5V	265,60	233,50	207,40	169,90	136,00	102,80	59,80	43,90	28,142	20,783	16,944	14,357	9,653	8,230	4,248
10.8V	249,80	221,20	193,80	161,40	132,00	99,70	58,60	42,80	27,129	20,103	16,427	13,950	9,414	8,038	4,164
11.1V	233,10	208,00	179,70	152,20	127,40	96,00	57,20	41,60	25,810	19,215	15,750	13,415	9,099	7,786	4,054

Discharge Constant Current (Watts at 68°F20°C)


F.V/Time	5min	8min	10min	15min	20min	30min	60min	90min	2h	3h	4h	5h	8h	10h	20h
9.60V	3393,0	2947,8	2667,6	2131,8	1718,4	1262,4	729,0	541,8	345,50	255,67	208,73	176,92	119,77	102,52	52,67
10.0V	3169,8	2792,4	2527,2	2040,0	1618,8	1215,6	701,4	520,8	342,93	253,82	207,23	175,78	118,93	101,76	52,34
10.2V	3074,4	2726,4	2464,8	2001,0	1575,6	1194,6	689,4	511,2	337,19	249,88	204,22	173,40	117,47	100,53	51,83
10.5V	2940,0	2623,2	2343,6	1931,4	1551,6	1176,0	686,4	505,8	329,73	244,87	200,36	170,34	115,53	98,91	51,14
10.8V	2805,0	2520,6	2222,4	1861,2	1527,6	1156,2	682,8	501,0	319,46	237,79	194,94	166,09	112,94	96,73	50,19
11.1V	2671,2	2418,0	2101,8	1791,0	1504,2	1136,4	679,8	495,6	305,58	228,31	187,62	160,26	109,41	93,84	48,94

Dimensions

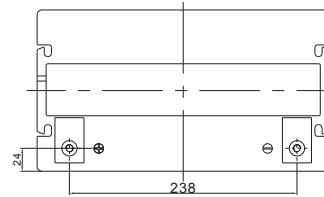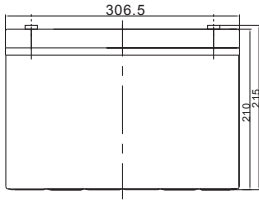


F12 Terminal


Discharge Characteristics

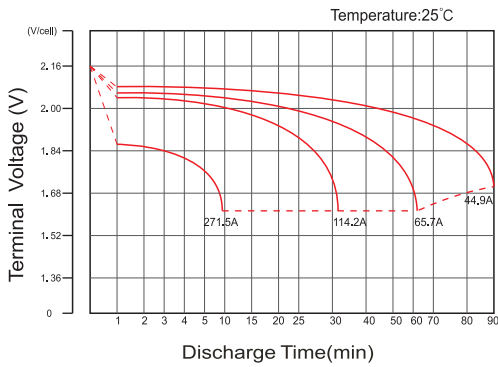


Float Charging Characteristics

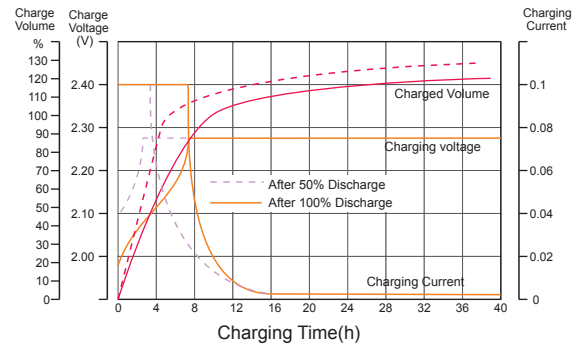


Temperature Effects in Relation to Battery Capacity

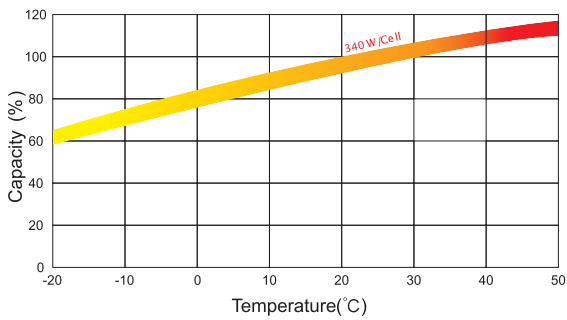

Effect of Temperature on Long Term Float Life

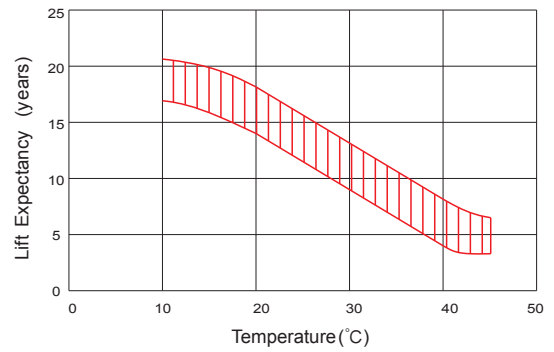

Cycle Life in Relation to Depth of Discharge

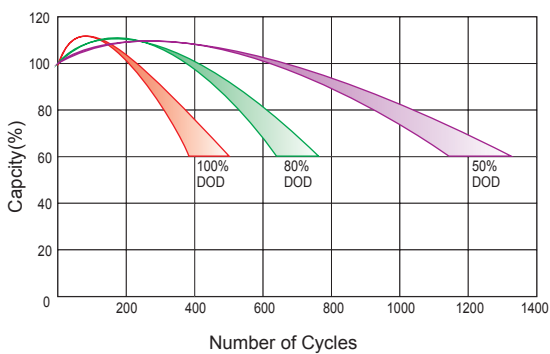

Self Discharge Characteristics

