



Technical data sheet

MTG 60-12

MOVE MTG-Batteries are valve regulated lead-acid batteries for the light traction market. With our innovative Gel-technology and maintenance free design, MOVE MTG-Batteries are compatible with all universal cyclic applications.

Features

- Maintenance-free bloc batteries in Gel technology
 - Stable high current performance for extreme conditions
 - High-class patented safety valve
 - Valve-regulated lead-acid battery filled with thixotropic gel.
 - Classified as a non-spillable battery, not restricted for transport by:
 - Air (IATA/ICAO provision 67)
 - Ground (STB, DOT-CFR-HMR49)
 - Water (IMDG amendment 27)
- 700 cycles according to **IEC 254-1**



Specifications

Nominal Voltage	: 12V
80% DoD Voltage Cutoff	: 11.4V (1,90vpc)
Nominal capacity 1.75VPC	: 20hr rate 60Ah
Capacity @25°C	: 10hr rate 57Ah
	: 5hr rate 52Ah
	:
Self Discharge	: < 3% per month (20°C)
Charge Temperature	: Min. -10°C / Max. 50°C
Discharge Temperature	: Min. -10°C / Max. 50°C
Storage Temperature	: Min. 0°C / Max. 30°C
Storage Time	: 12 months




Dimensions

L x W x H (T) in mm	: 254 x 168 x 175 (177)
BCI-Group	: 34
Weight	: 20.5kg (±2%)
Terminal	: Female insert M6
Terminal Torque Setting	: 6 Nm

Applications:



- Electric Vehicles (EV)
- Home Mobility Equipment (HME)
- Cleaning Equipment
- Aerial working platforms (AWP)
- All cyclic applications

GEL Cycle Life vs Depth of Discharge at +25°C
Based on IEC 254-1

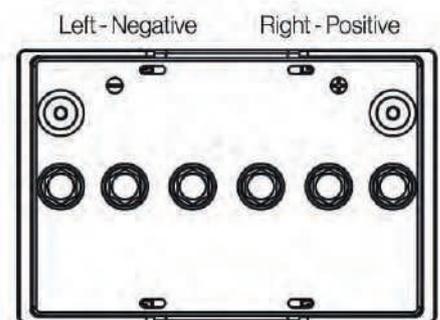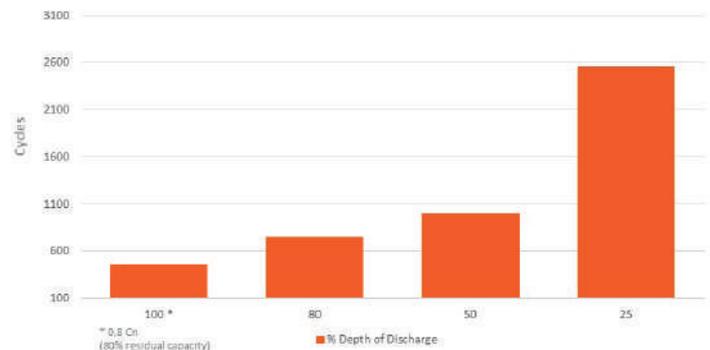

Charging Profile @25°C in cyclic application

IU Charging	I	=	Min. 6Amp max. 10Amp
	U	=	2.43V per cell
IUI Charging	I ¹	=	Min. 6Amp max. 10Amp
	U	=	2.38V per cell
	I ²	=	Min. 0,8Amp for max. 4 hours to max 2.65V per cell
Float-voltage	U-float	=	2,30VPC
Temperature compensation		=	3 Mv per degree°C up or down from 25°C

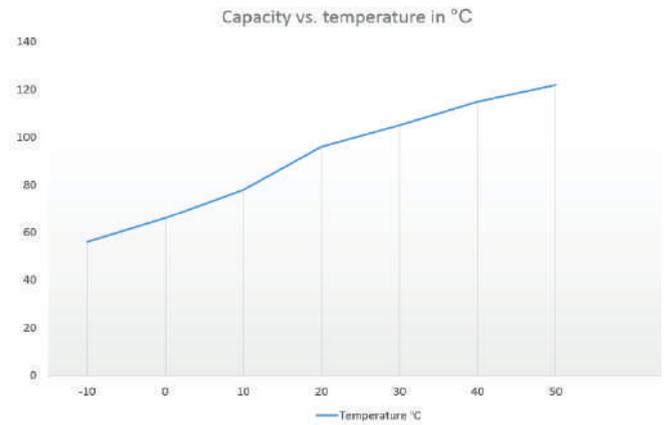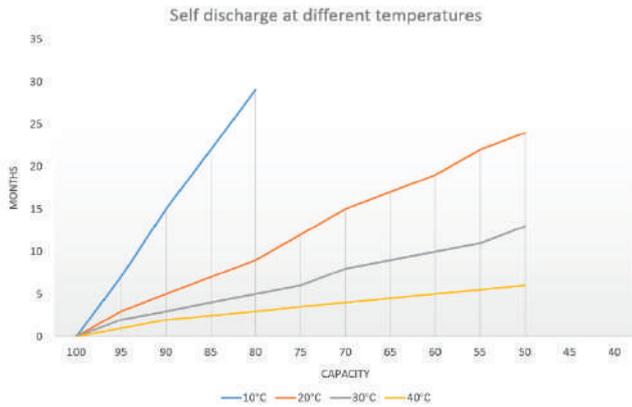

MOVE Batteries has a full range of batteries in the MTG-series.
This range is extended and updated regularly, please check the website for all other types.