

SSB SBL 41-12HR (12V 930W)

Specification

Nominal Voltage	12V	
Nominal Power (Watt / 20°C / 10.0 V/Battery)	5 min	1166,3 W / 12V-Battery
	10 min	929,8 W / 12V-Battery
	15 min	750,6 W / 12V-Battery
Nominal Power (Watt / 20°C / 1.67 V/C)	5 min	193,88 W / 1.67 V/C
	10 min	154,96 W / 1.67 V/C
	15 min	125,1 W / 1.67 V/C
Nominal Capacity (10hr / 20°C / 10.0 V/Battery)	32,9 Ah	
Internal Resistance	Fully Charged battery 68°F(20°C)	≤9 mOhms
Self-Discharge	3% of capacity declined per month at 20°C (average)	
	SSB series batteries may be stored for up to 6 months at 68°F(20°C) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	
Dimension	Length (mm / inch)	195 / 7.68
	Width (mm / inch)	130 / 5.12
	Height (mm / inch)	155 / 6.10
	Total Height (mm / inch)	168 / 6.61
Approx. Weight (Kg / lbs)	10.2 / 22.5	
Operating Temperature Range (temporarily – see our manual)	Discharge	-20~50°C
	Charge	-10~50°C
	Storage	-20~50°C
Max. Discharge Current 68°F(20°C)	330A(5s)	
Short Circuit Current	930A	
Charge Methods: Constant Voltage Charge 68°F(20°C)	Cycle use	2.40-2.45VPC
	Maximum charging current	9.9 A
	Temperature compensation	-30mV/°C
	Standby use	2.20-2.28VPC
Life expectancy	Temperature compensation	-20mV/°C
	10~12 years at 20°C with charge voltage 2.25V/cell	

*All specifications are approximate values



Applications

- ◆ Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- ◆ Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- ◆ UL-recognized component.
- ◆ Can be mounted in any orientation.
- ◆ Computer designed lead, calcium tin alloy grid for high power density.
- ◆ Long service life, float or cyclic applications.
- ◆ Maintenance-free operation.
- ◆ Low self discharge.
- ◆ Case and cover available in both standard and flame retardant ABS.



Conform to:
IEC60896-21&22 and/or IEC61427





Discharge Constant Current (Amperes at 68°F20°C)

F.V/Time	5min	8min	10min	15min	20min	30min	60min	90min	2h	3h	4h	5h	8h	10h	20h
9.60V	116,66	99,90	89,85	71,37	57,34	42,03	24,16	17,89	11,628	8,538	6,935	5,854	3,912	3,327	1,706
10.0V	107,94	93,71	84,30	67,66	53,48	40,06	23,03	17,04	11,457	8,425	6,849	5,787	3,872	3,295	1,693
10.2V	103,46	90,41	81,25	65,57	51,44	38,93	22,36	16,52	11,231	8,273	6,734	5,697	3,820	3,253	1,674
10.5V	97,71	85,89	76,30	62,50	50,03	37,83	22,00	16,15	10,932	8,073	6,582	5,577	3,750	3,197	1,650
10.8V	91,91	81,37	71,31	59,37	48,55	36,67	21,56	15,76	10,538	7,809	6,381	5,419	3,657	3,123	1,618
11.1V	85,77	76,51	66,11	55,99	46,86	35,32	21,05	15,29	10,026	7,464	6,118	5,211	3,535	3,024	1,575


Discharge Constant Current (Watts at 68°F20°C)

F.V/Time	5min	8min	10min	15min	20min	30min	60min	90min	2h	3h	4h	5h	8h	10h	20h
9.60V	1248,3	1084,6	981,4	784,3	632,3	464,5	268,1	199,3	134,21	99,31	81,08	68,72	46,52	39,82	20,46
10.0V	1166,3	1027,3	929,8	750,6	595,5	447,1	258,0	191,6	133,21	98,59	80,50	68,28	46,20	39,53	20,33
10.2V	1131,1	1003,0	906,8	736,1	579,6	439,6	253,5	188,1	130,98	97,07	79,33	67,36	45,63	39,05	20,13
10.5V	1081,7	965,0	862,2	710,5	570,9	432,6	252,5	186,2	128,08	95,12	77,83	66,17	44,88	38,42	19,86
10.8V	1032,1	927,4	817,6	684,7	562,0	425,4	251,1	184,3	124,09	92,37	75,72	64,52	43,87	37,57	19,50
11.1V	982,7	889,7	773,3	658,9	553,4	418,0	250,1	182,4	118,70	88,69	72,88	62,25	42,50	36,45	19,01


Dimensions

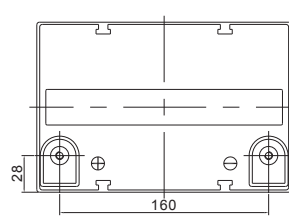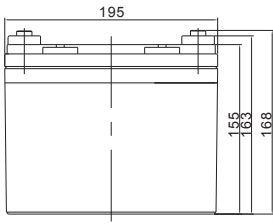


Discharge Characteristics

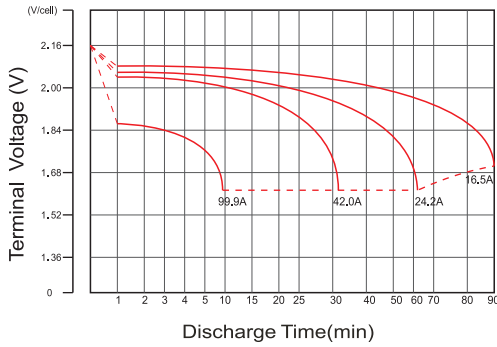


Float Charging Characteristics

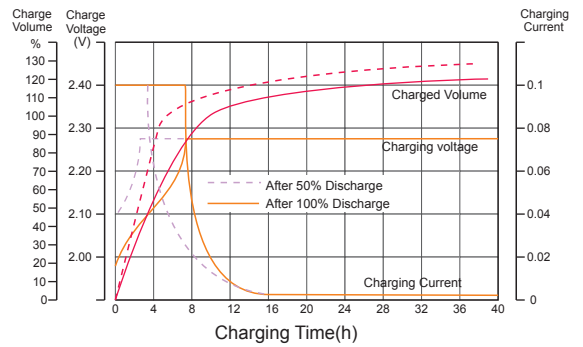


Temperature Effects in Relation to Battery Capacity

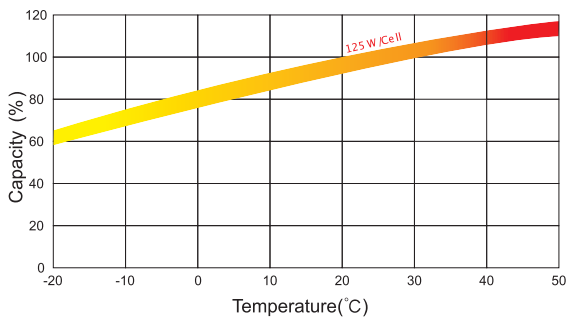

Effect of Temperature on Long Term Float Life

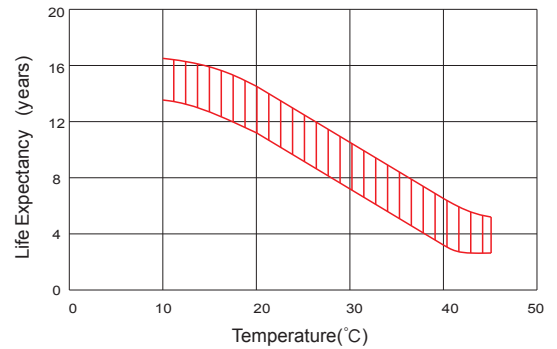

Cycle Life in Relation to Depth of Discharge

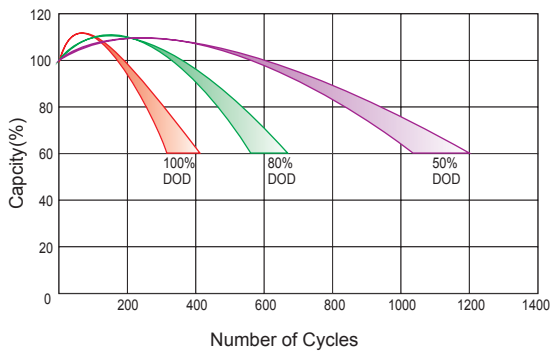

Self Discharge Characteristics

